

## Nonlinear Controller for the Laser Fiber Using PID Controller

Haider Yahya Saeed, Husam Noman Mohammed Ali, Ali Abdul Abas Al Bakri  
and Haidar Zaeer Dhaam\*

*Communication, Technical Engineering, Communication, Al Furat Al Awast Technical University, Najaf, Iraq*

\*Corresponding author: [haider.saeed.ms.etcn@student.atu.edu](mailto:haider.saeed.ms.etcn@student.atu.edu)

**Abstract.** We show that a software architecture based on machine learning and adaptive control advances makes self-tuning optics possible. Commercially available optical telecom components may be combined with servo controllers to develop a training and execution software module that can self-tune the laser cavity even when it is switched off. Mechanical and/or environmental disturbances may aid in frequency comb stabilization. An exhaustive search of state space is used in the algorithm training stage to find the optimum performance areas for one or more objectively interesting functions. The technique of implementation stage starts by identifying the variable space using a sparse sensing approach, then settles on a near-optimal solution and maintains it using the extremum seeking control protocol.

**Keywords:** Laser, fiber, communication, nonlinear control, fiber laser, deep learning.

### INTRODUCTION

Accomplish a nearly ideal result. While designing then analysis of such organizations are quite important with regard to defining-underlying movable then area of possible behaviors, organizations, nonlinearities, and feeling to a multidimensional parameter space typically make quantitatively precise system performance forecasts challenging. This is especially correct for mode\_locked lasers [1–3] – wherever – the major physical effects have been understood for over three decades but a measurable predictive performance theory has eluded researchers. The basic, extremely sensitive character of man-s stochastically fluctuating fluctuations in physical factors that interact with the networked, nonlinear organization is highlighted by such quantitative discrepancy. The fact that fiber birefringence fluctuates randomly along the fiber is widely known. Mode-locked fiber lasers, for example, are an example of this. Refraction plus the consequent mode-locking show can be influenced by environmental temperature changes as well as modification of the fiber physically (bending). Fiber lasers for commercial use are linked in-to site and then insulated from environmental variations in order to maintain performance. Using a robust control method on the laser to notice parameter changes and adaptively adjust the parameter site to attain near-optimal show is

an alternative to environmental shielding. In the following sections, we will explain how machine learning and adaptive control approaches may establish a new paradigm for self-tuning, intelligent systems with equation-free architectures automated systems accomplished of – self-tuning, and near-optimal accomplishment in a method-locked laser in this study. We use these novel data-driven methodologies to develop an – In the algorithmic infrastructure, there are learning and execution modules. The learning module explores parameter space with rigor. Identifying areas of optimal performance and building a collection of these parameter rules. The implementation module makes use of the learned behavior by main recognizing the current parameter regime and then fast switching to the most optimum method-locking rule. The Extremum Seeking Controller (ESC) then maintains a near-optimal amount of mode locking. A numerical typical of a laser power mode-locked by a series of wave plates and polarizers is used to show the algorithm-s success.

### PROBLEM FORMULATION

The various polarisation dynamics and energy equilibration that commence the mode-locking process should be accounted for by the intra-cavity dynamics of the mode-locked laser of interest, among other things. Figure 1 shows

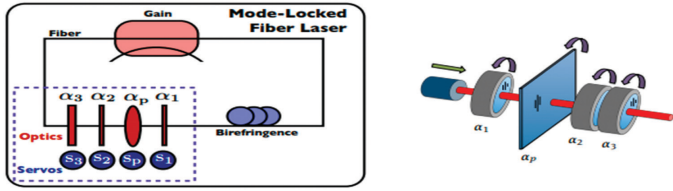


Figure 1. Schematic diagram for the mode-locked fiber laser, ADAPTED [12].

an example of a cavity structure utilized in experiments to create stable and durable mode-locking [1, 3]. The remaining physical factors in the laser cavity are merged into an average total propagation equation that incorporates chromatic dispersion, Kerr non-linearity, absorption, and bandwidth-limited, saturating gain [4–8]:

$$i \frac{du}{dz} + \frac{D}{2} \frac{d^2u}{dt^2} - Ku + (|u|^2 + A|v|^2)u + Bv^2u^* = ig(z) \left( 1 + \Omega \frac{d^2}{dt^2} \right) u - i\Gamma u \quad (1)$$

$$i \frac{dv}{dz} + \frac{D}{2} \frac{d^2v}{dt^2} - Kv + (A|u|^2 + |v|^2)v + Bu^2v^* = ig(z) \left( 1 + \Omega \frac{d^2}{dt^2} \right) v - i\Gamma v \quad (2)$$

On the left hand side of this equation are the linked nonlinear Schrödinger equations (CNLS). The non-dimensionalized averaged propagation of two orthogonally polarized electric field envelopes through a birefringent optical fiber is simulated by this system, where  $u$  and  $v$  fields are orthogonally polarized components of the electric field, [9–12]:

$$g(z) = \frac{2g_0}{1 + \frac{1}{E_0} \int_{-\infty}^{\infty} (|u|^2 + |v|^2) dt} \quad (3)$$

And linear attenuation, as well as (-cavity losses-). Models of the fiber laser cavity-s distributed loss, -owing to output coupler, fiber attenuation, interconnections, and splicing. -whereas  $g_0$  and  $E_0$  represent the gain (pump) strength and cavity saturation energy, respectively, in this equation. This option -determines the gain media-s width. -Erbium-doped fiber, for example, has a gain bandwidth of about 20–30 nanometers. The purpose of this article was to apply sophisticated data approaches, such as machine learning techniques, to help in the identification of an efficient cavity birefringence proxy. In contrast to optical communications, the laser cavity dynamics are governed by a single realization of a stochastic change in birefringence whereas a pulse may have a numerical average across extended distances (See Figure 2). When there is a disturbance in the cavity, by bends, twists, orthotropic tension, and/or ambient temperature, a new realization emerges. To identify the waveplate and polarizer settings,

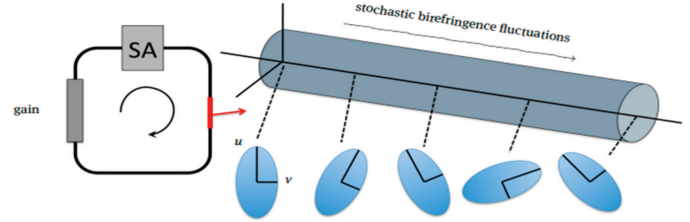


Figure 2. Schematic diagram for the polarization angle effects, adapted from [13].


for example, the highest energy efficiency, it is important to accurately define or detect fiber birefringence in order to improve performance. Our individuals learning subsystem-s ultimate goal is to assess the influence of birefringence on performance and find the best appropriate operating regimes given the unique birefringence, not to replicate or mimic it.

### Deep Learning Techniques


The first step in the toroidal search is to find all of the input limits that may be used to regulate and change the behavior of the system. The polarizer and three wave-plates that may be rotated from 0 to  $2\pi$ , resulting in 4-torus parameter space, are easily recognizable in the trial setup of a mode-locked fiber laser with an NPR basis-. Polarization ears capable of adjusting the cavity birefringence can also be added to the cavity. For the time being, we will suppose that the average birefringence is set to an unknown number. Surprisingly, the strategy advised here could be the only practical option to train a large number of NPR laser cavities to attain optimal, high-capacity performance-. The produced parameter must be sampled or data-mined in order to do so. A spiral search algorithm is built (4N-torus). If we wish to look at this 4N-dimensional torus, we will need 4N time series made up of:

$$\theta_{j(t)} = w_{jt} + \theta_{j_0} \quad (4)$$


The equation  $m_j + nk = 0$  does not have an integer solution for  $j \in [1, \dots, 4N]$ , where  $j_0$  is the starting parameter value and  $I$  is the incommensurate angular frequencies. For all  $j, k \in [1, \dots, 4N]$ ,  $j/k$  is irrational. It's easy to show that  $\{1(t) \dots 4N(t)\}$  is dense on the torus [15] under such circumstances. On a two-torus with parameters 3 and  $p$ , Figure 3 shows how toroidal sampling works. The time series of the objective function  $O$  is displayed as the 2-torus is sampled. The goal function is aliased in Fig. 3(a) because the torus is under-sampled. The objective function is fully created- and the optimal performance may be calculated when the sampling rate rises, as illustrated in Figure 3(b). The laser cavity-s ideal global maxima are in fact represented by the red dot in Fig. 3(c). In Fig. 3(d), the small shaded region surrounding this peak performance is emphasized, and a second evaluation of whether or not the solution is mode-locked is done.

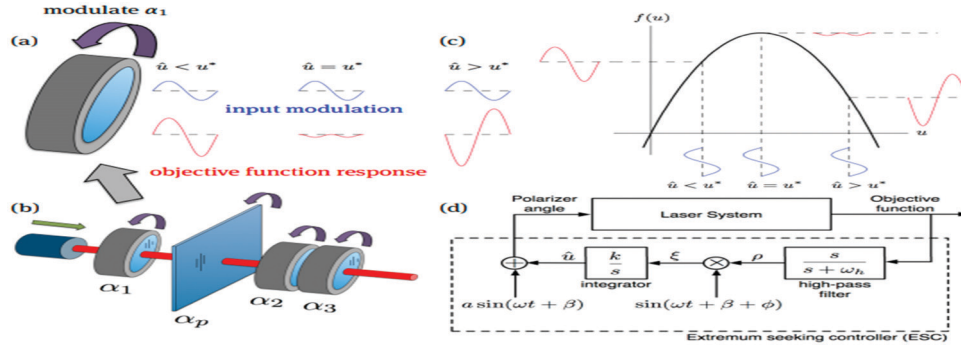

**Figure 3.** Schematic diagram; (a) samples of the polarization angle; (b) modelling of multi-loop gain; (c) input-output curves; (d) proposed control system.

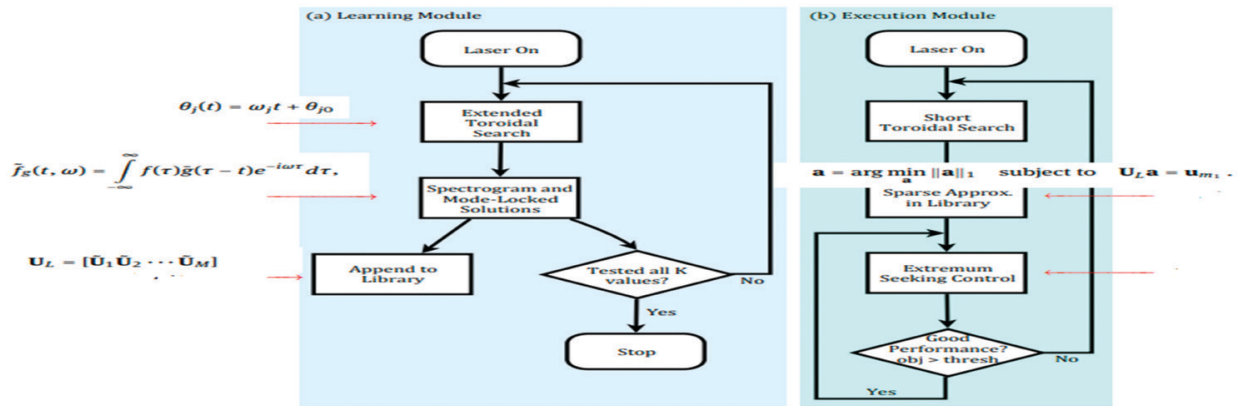

**Figure 4.** Global searching algorithm.

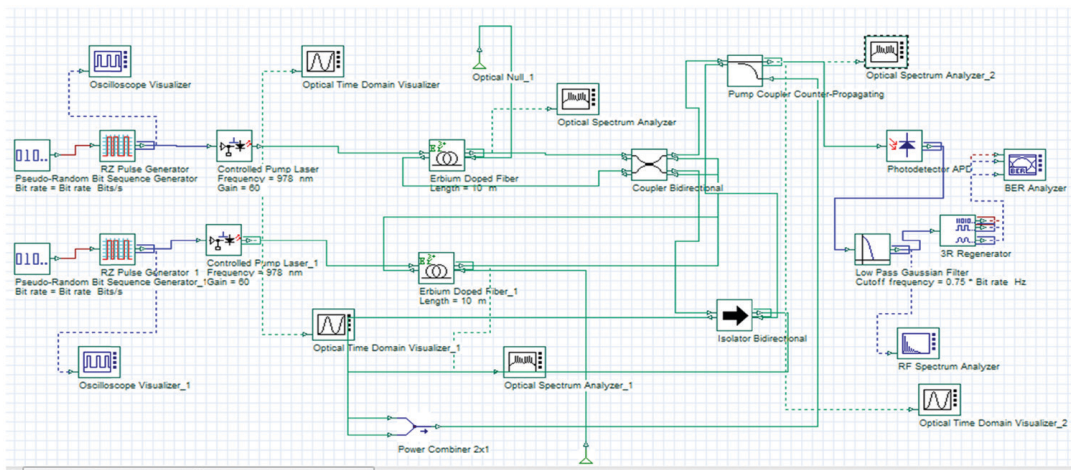

**Figure 5.** Simulation setup of the double laser system.

The non-zero components of the sparse vector  $\mathbf{a}$  serve as a classifier (indicator function) for detecting which sub-library the birefringence belongs to after the L1-norm reduction. As a result, the recognized birefringence value is equal to  $K_i$  if the biggest element belongs to the  $i$ -th sub-library. When paired with the unique spectrograms, this sparsity-promoting optimization results in a fast and accurate fiber birefringence categorization method. As a result, the detection of birefringence is simple (as shown in Fig. 4).

## SIMULATION SETUPS AND RESULTS

Figure 5 illustrates the simulation system's modeling, where the op-net software has been used to complete all the components. The controller architecture for adjusting the angles is depicted in Figure 6. The execution module is seen in Figure 7. In this experiment, the mean cavity birefringence is altered slowly (and randomly) over the period of 60 minutes. It's easy to utilize the execution

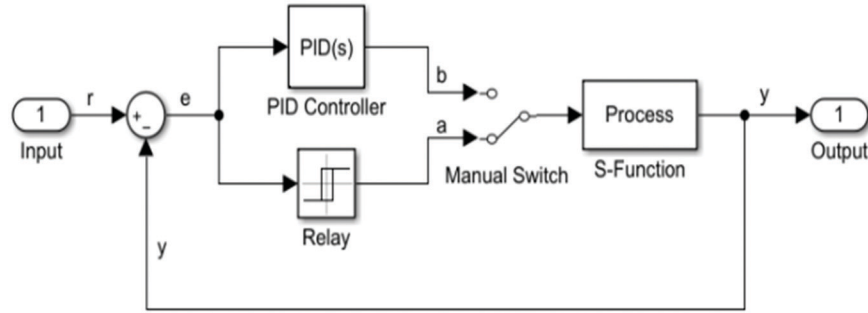


Figure 6. Schematic diagram for the Pid controller.

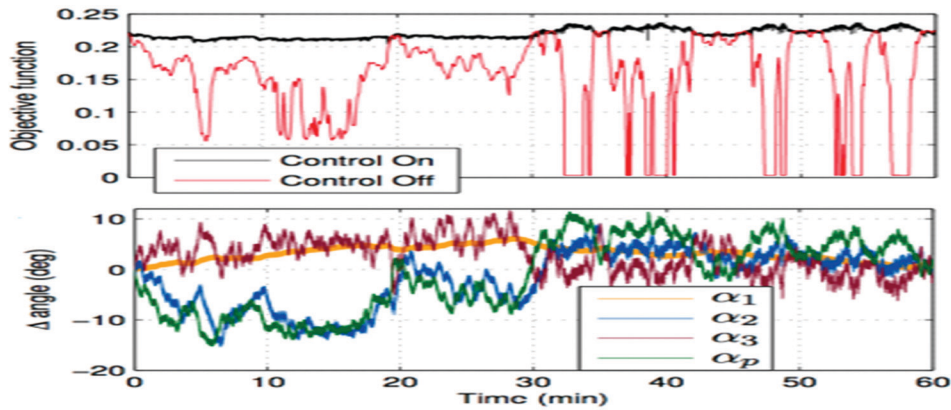


Figure 7. Simulation results with control on and off.

Table 1. Bandwidth 6 THZ, time between (2n-14n)-, and  $\alpha_1$ .

Device angle	10	20	30	40	50	60	70	80	90	100	110	120	130	140
Amplitude(m)	340	230	255	400	600	760	805	720	540	340	230	260	400	620

Table 2. Bandwidth 6 THZ, time between (2n-14n)-, and  $\alpha_1$ .

Device angle	150	160	170	180	190	200	210	220	230	240	250	260	270	280
Amplitude(m)	800	840	720	540	340	230	260	400	600	760	800	720	540	340

Table 3. Bandwidth 6 THZ, time between (2n-14n)-, and  $\alpha_1$ .

Device angle	290	300	310	320	330	340	350	360
Amplitude(m)	230	260	400	620	800	840	660	540

module. The data approaches mentioned in the preceding sections can be combined to produce a reliable mode-locked laser self-tuning algorithm. The hunt for a toroid, is used to find candidate regimes for optimum mode-locking by searching for the parameter. Multiple objective functions can be used to conduct the search and assess the results; when cavity performance requirements change, optimization procedures can be tweaked to meet the new demands. The best solutions are saved (or stored) in a library structure using their spectrogram form. The body of the paper consists of numbered sections that present the main findings. These sections should be organized to best present the material.

Tables 1, 2 and 3 list the desired value of the angles that have been used.

## CONCLUSIONS

Since it does not need the user to have extensive, quantitatively correct knowledge about the system under examination, the technique presented in this study is interesting because it is equation-free. Rather, data from the system is collected, in this instance optical spectrum and power measurements, in order to construct an appropriate objective function. Surprisingly, the parameter space-exploring toroidal search learning method may be assessed with any number of objective functions. In mode-locked lasers and regularity comb applications, this might mean striving for the shortest, most intense, or most consistent phase-locking between round trips. Self-tuning is possible if a sufficiently large objective function can be built. Since

all the technology needed to implement the method is presently accessible, our research underlines the necessity of integrating hardware, software, and algorithms to maximize technological potential. As a result, our findings highlight the need of combining hardware with software and algorithms in order to significantly increase the potential for technological growth.

## CONTRIBUTIONS

1. The author conducted a study, analyzed and implemented the system using opti net of the types of lasers and the types of optical fibers that are meant by mods, and we saw the effect of bending.
2. The author solved the problem of the source, and the best value of the current for lasers, so that we can work on a solution for physical nonlinearity in optical fiber. Finding optimal current  $i_{d1}$  and  $i_{d2}$  for the laser diode
3. The author used a control system. We combined the control with the polarization angle to find the best value for the polarization. In this case, we solved a problem of gain and gave it the best value for the signal transmitter from transmitter to receiver.

## ACKNOWLEDGMENTS

This is a brief sentence to thank particular collaborators, organizations, or agencies that supported the writers' work. I want to extend my sincere gratitude to both of my supervisors, assistant Prof. Dr. Ali Abdul Abas Al Bakri and assistant Dr. Husam Noman Mohammed Ali, for giving me the chance to complete very fascinating thesis work.

With the help of my thesis, I was able to get a thorough understanding of the process of creating a nonlinear controller for a laser fiber using a PID controller, as well as a wealth of information and expertise in the field of optical communication.

## REFERENCES

- [1] D. J. Richardson, J. Nilsson, and W. A. Clarkson, "High power fiber lasers: current status and future perspectives," *J. Opt. Soc. Am. B* 27, B63–B92 (2010).
- [2] J. N. Kutz, "Mode-locked Soliton Lasers," *SIAM Review* 48, 629–678 (2006).
- [3] H. A. Haus, "Mode-locking of lasers," *IEEE J. Sel. Top. Quant. Elec.* 6, 1173–1185 (2000).  
M. Krstić and H. Wang, "Stability of extremum seeking feedback for general nonlinear dynamic systems," *Automatica* 36, 595–601 (2000).
- [4] J. Choi, M. Krstić, K. Ariyur, and J. Lee, "Extremum seeking control for discrete-time systems," *IEEE Transactions on Automatic Control* 47, 318–323 (2002).
- [5] K. B. Ariyur and M. Krstić, *Real-Time Optimization by Extremum Seeking Control* (Wiley, 2003).  
Grelu, P. & Akhmediev, N. Dissipative solitons for mode-locked lasers. *Nature Photonics* 6, 84–92 (2012).
- [6] Wise, F., Chong, A. & Renninger, W. High-energy femtosecond fiber lasers based on pulse propagation at normal dispersion. *Laser & Photonics Reviews* 2, 58–73. <https://doi.org/10.1002/lpor.200710041> (2008).
- [7] Fu, W., Wright, L. G., Sidorenko, P., Backus, S. & Wise, F. W. Several new directions for ultrafast fiber lasers. *Optics Express* 26, 9432–9463. <https://doi.org/10.1364/OE.26.009432> (2018).
- [8] Turitsyn, S. K., Bale, B. G. & Fedoruk, M. P. Dispersion-managed solitons in fibre systems and lasers. *Physics Reports* 521, 135–203. <https://doi.org/10.1016/j.physrep.2012.09.004> (2012).
- [9] Bale, B., Okhitnikov, O. & Turitsyn, S. *Modeling and Technologies of Ultrafast Fiber Lasers* 135–175 (Wiley, Hoboken, 2012).
- [10] Kim, J. & Song, Y. Ultralow-noise mode-locked fiber lasers and frequency combs: principles, status, and applications. *Adv. Opt. Photon.* 8, 465–540. <https://doi.org/10.1364/AOP.8.000465> (2016).
- [11] Chernysheva, M. et al. Carbon nanotubes for ultrafast fiber lasers. *Nanophotonics* 6, 1–30. <https://doi.org/10.1515/nanoph-2015-0156> (2017).
- [12] Baumeister, T., Brunton, S. L. & Kutz, J. N. Deep learning and model predictive control for self-tuning mode-locked lasers. *JOSA B* 35, 617–626. <https://doi.org/10.1364/JOSAB.35.000617> (2018).
- [13] Chang, G. & Wei, Z. Ultrafast fiber lasers: an expanding versatile toolbox. *iScience* 23, 101101. <https://doi.org/10.1016/j.isci.2020.101101> (2020).
- [14] Shtyrina, O. V., Yarutkina, I. A., Skidin, A., Fedoruk, M. P. & Turitsyn, S. K. Impact of the order of cavity elements in all-normal dispersion ring fiber lasers. *IEEE Photonics J.* 7, 1–7. <https://doi.org/10.1109/JPHOT.2015.2413591> (2015).
- [15] Nyushkov, B. N., Kobtsev, S. M., Ivanenko, A. V. & Smirnov, S. V. Programmable optical waveform generation in a mode-locked gain-modulated SOA-fiber laser. *JOSA B* 36, 3133–3138 (2019).
- [16] Nyushkov, B., Ivanenko, A., Smirnov, S., Shtyrina, O. & Kobtsev, S. Triggering of different pulsed regimes in fiber cavity laser by a waveguide electro-optic switch. *Opt. Express* 28, 14922–14932 (2020).  
Kelly, S. Characteristic sideband instability of periodically amplified average soliton. *Electron. Lett.* 28, 806–807 (1992).
- [17] E. Ding, W. Renninger, F. Wise, P. Grelu, E. Shlizerman and J. N. Kutz. "High-Energy Passive Mode-Locking of Fiber Lasers," *Int. J. Opt.* 2012, 354156 (2012).
- [18] C. R. Menyuk, "Pulse propagation in an elliptically birefringent Kerr media," *IEEE J. Quant. Electron.* 25, 2674–2682 (1989). [10] C. R. Menyuk, "Nonlinear pulse propagation in birefringent optical fibers," *IEEE J. Quant. Electron.* 23, 174–176 (1987).
- [19] A. Gerrard and J. M. Burch, "Introduction to Matrix Methods in Optics," Dover (1994). [12] A. Komarov, H. Leblond, F. Sanchez, "Multistability and hysteresis phenomena in passively mode-locked fiber lasers" *Phys. Rev. A* 71, 053809 (2005).
- [20] A. Komarov, H. Leblond, F. Sanchez, "Quintic complex Ginzburg-Landau model for ring fiber lasers," *Phys. Rev. E* 72, 025604 (2005).
- [21] E. Ding, E. Shlizerman and J. N. Kutz, "Generalized Master Equation for High-Energy Passive Mode-Locking: The Sinusoidal Ginzburg-Landau Equation," *IEEE J. Quantum Electron.* 47, 705–714 (2011).
- [22] gheni, Hassan Muwafaq; Abdullah, M.F.L.; Omar, Khaldoun Anmar; Qasim, Abdullah Ali; Abdulrahman, Anas Malik; fakhri, Marwan najm; Dawood, Abdullah (2019). [IEEE 2019 International Conference on Information Science and Communication Technology (ICISCT) – Karachi, Pakistan (2019.3.9-2019.3.10)] 2019

- International Conference on Information Science and Communication Technology (ICISCT) – Radio Over Fiber (RoF) Implementation using MZM For Long Distance Communication, 1–6. doi:10.1109/ICISCT.2019.8777428
- [23] Measurements of Intermodal Dispersion In Graded Index Optical Fiber.
- [24] gheni, Hassan Muwafaq; Abdullah, M.F.L.; Talib, R.; Omar, Khaldoon Anmar; Qasim, Abdullah Ali; Abdulrahman, Anas Malik; fakhri, Marwan najm; Dawood, Abdullah (2019). [IEEE 2019 International Conference on Information Science and Communication Technology (ICISCT) – Karachi, Pakistan (2019.3.9-2019.3.10)] 2019 International Conference on Information Science and Communication Technology (ICISCT) – Simulation of Undersea Optical Communication System using DCF and SSF, 1–5. doi:10.1109/ICISCT.2019.8777416.