

Weed Detection Using Convolutional Neural Network

M. S. Hema*, V. Abhilash, V. Tharun and D. Madukar Reddy

Department of Information Technology, Anurag University Hyderabad

**Corresponding author: hemait@anurag.edu.in*

Abstract. Precision agriculture relies heavily on information technology, which also aids agronomists in their work. Weeds usually grow alongside crops, reducing the production of that crop. Weeds are controlled by herbicides. The pesticide may harm the crop as well if the type of weed isn't identified. In order to control weeds on farms, it is required to identify and classify them. Convolutional Network or CNN, a deep learning-based computer vision technology, is used to evaluate images. A methodology is proposed to detect weed using convolutional neural networks. There were two primary phases in this proposed methodology. The first phase is image collection and labeling, in which the features for images to be labeled for the base images are extracted. In second phase to build the convolutional neural network model is constructed by 20 layers to detect the weed. CNN architecture has three layers namely convolutional layer, pooling layer and dense layer. The input image is given to convolutional layer to extract the features from the image. The features are given to pooling layer to compress the image to reduce the computational complexity. The dense layer is used for final classification. The performance of the proposed methodology is assessed using agricultural dataset images taken from Kaggle database.

Keywords: CNN, Weed, Precision Agriculture and Segmentation.

INTRODUCTION

Farmers' main issue is detecting weeds from the crop during the irrigation process. Manual work for detecting the crop and weed takes a long time, and more human effort is required to complete this procedure. Weed identification in plants has become more challenging in recent years. So far, there hasn't been much effort put into identifying weeds while growing crops. Traditional methods for identifying agricultural weeds focused on directly identifying the weed; nevertheless, there are substantial differences in weed species. In contrast to this method, this study proposes a revolutionary technique that combines deep learning with imaging technology. The dataset was first trained using the CNN model. We can categorize and predict the provided input image as weed or crop once the training is completed. The major goal of this project is to use the CNN deep learning algorithm to detect and classify weeds and crops.

As a result, we are building our project to detect weeds utilizing the CNN method to solve this challenge. Our findings will aid with crop and weed classification, saving humans time and effort. Manual labor may overlook

proper classification on occasion, which is where our project will come in handy in finding the correct classification and projection.

LITERATURE SURVEY

Object oriented algorithms is proposed to detect the weed in the agricultural field [1]. A comprehensive and critical survey on image-based plant segmentation techniques is presented. In this context, "segmentation" refers to the process of classifying an image into plant and non-plant pixels [2]. Non-chemical weed control is important both for the organic production of vegetables and achieving ecologically sustainable weed management. Estimates have shown that the yield of vegetables may be decreased by 45%–95% in the case of weed–vegetable competition. Non-chemical weed control in vegetables is desired for several reasons [3]. The mixer is used to spray pesticides to alleviate weeds from crops [4]. Robot technology is used to find weed and pesticides is used to alleviate weeds [5]. A comprehensive review of research dedicated to applications of machine learning in agricultural production systems

is presented. The works analyzed were categorized in (a) crop management, including applications on yield prediction, disease detection, weed detection crop quality, and species recognition; (b) livestock management, including applications on animal welfare and livestock production; (c) water management; and (d) soil management [6]. ML and DL techniques have been used for weed detection, recognition and thus for weed management. In 2018, Kamilaris and Prenafeta-Boldú (2018) published a survey of 40 research papers that applied DL-techniques to address various agricultural problems, including weed detection. The study reported that DL-techniques outperformed more than traditional image processing methods [7]. Discussed ten components that are essential and possible obstructions to develop a fully autonomous mechanical weed management system [8]. The authors focused on different machine vision and image processing techniques used for ground-based weed detection [9]. Fernández-Quintanilla et al. (2018) reviewed technologies that can be used to monitor weeds in crops. They explored different remotely sensed and ground-based weed monitoring systems in agricultural fields. They reported that weed monitoring is essential for weed management. They foresaw that the data collected using different sensors could be stored in cloud systems for timely use in relevant contexts [10]. The VGG-16 model for classifying the crop plants and weeds. They also trained the model with one dataset containing sunflower crop and evaluated it with two different datasets with carrots and sugar beets crops [11]. Author describes “Weed detection using image processing” how they can detect and separate out weed affected area from the crop plants using image processing [12]. A methodology is proposed to detect weed using image processing techniques. The properties are extracted from the image and weed is detected from the extracted features [13]. Machine vision uses unique image processing technique. Weeds in agricultural field had detected by its properties such as Size, Shape, Spectral Reflectance, Texture features [14]. two methods proposed for weed detection: crop row detection in images from agriculture fields with high weed difficulty and to further differentiate between weed and crop [15]. Author proposed “Crop and weed detection based on texture and size features and automatic spraying of herbicides” they developed the image processing algorithm for yield finding and management of weed [16]. A computer vision application to detect unwanted weed in early stage crops is proposed [17]. A Novel approach for weed classification using curvelet transform and tamura Texture feature (CTTTF) with RVM classification methodology is proposed [18]. Robots are working collaboratively with humans and learning from them how to realize the basic agriculture tasks such as weed detection, watering or seeding (Marinoudi et al., 2019) [19]. Weed detection using deep learning is proposed [20]. Implementation of image processing in drones instead of robots, that way, they not

only detect weeds, but also monitor the growth of crops is proposed. By combining image processing and CNN in drones, they get different accuracies depending on the processing, which is from 98.8% with CNN to 85% using Histograms of Oriented Gradients (HOG) [21]. The authors combined Hough transform with simple linear iterative clustering (SLIC). This method focuses on the detection of crop lines [22]. A threshold based on the classification values of the area for a crop or a weed is proposed [23].

PROPOSED METHODOLOGY

The main objective of the proposed methodology is detect weed. The convolutional neural network is proposed for wee detection. The architecture of proposed methodology is shown in Figure 1.

The convolution layer is used to extract the features from the image. The Rectified Linear Unit (ReLU) activation function is used in convolutional layer. The ReLU helps to break up the linearity even further, compensating for any linearity that may be imposed on an image during the convolution process. As a result, ReLU aids in avoiding the exponential growth of the computation required to run the neural network. As the size of the CNN rises, the computational cost of adding more ReLUs grows linearly. Another non-linear activation function that has gained prominence in the deep learning sector is the ReLU function. ReLU is an abbreviation for Rectified Linear Unit. The key benefit of employing the ReLU function over other activation functions is that it does not simultaneously stimulate all of the neurons.

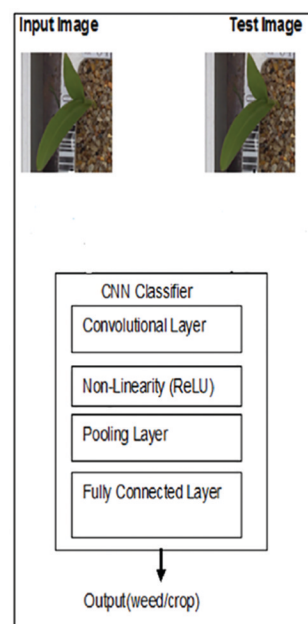


Figure 1. Weed detection architecture.

The feature maps' dimensions are reduced by using pooling layers. As a result, the number of parameters to learn and the amount of processing in the network are both reduced. The pooling layer summarizes the features found in a specific region of the feature map created by the convolution layer. The pooling layer is a crucial layer that performs down-sampling on the feature maps from the previous layer, resulting in new feature maps with a reduced resolution. This layer significantly decreases the input's spatial dimension. The output from the final Pooling or Convolutional Layer, which is flattened and then fed into the fully connected layer, is the input to the fully connected layer. In neural network models that predict a multinomial probability distribution, the Softmax function is utilized as the activation function in the output layer. Softmax is used as the activation function for multi-class classification problems requiring class membership on more than two labels. CNNs are trained to recognize and extract the best features from images that are relevant to the problem at hand. Their biggest advantage is this. Because of their effectiveness as a classifier, the CNN's last layers are fully connected. Because CNNs include FC layers, these two architectures aren't competing as much as you might imagine. Finally, we'll finish things up and give a quick overview of the section's main concepts.

RESULTS AND DISCUSSION

The agriculture image is taken from kaggle database. It consists of 1000 weeds and crops images. 80% of the images are used for training and 20% of the images are used for validation.

The Figure 2 shows the performance of the proposed approach. The accuracy of the training set is improved when number of epochs increased. The validation set accuracy is very when number of epochs are less after that the accuracy is increase when number of epochs is increased.

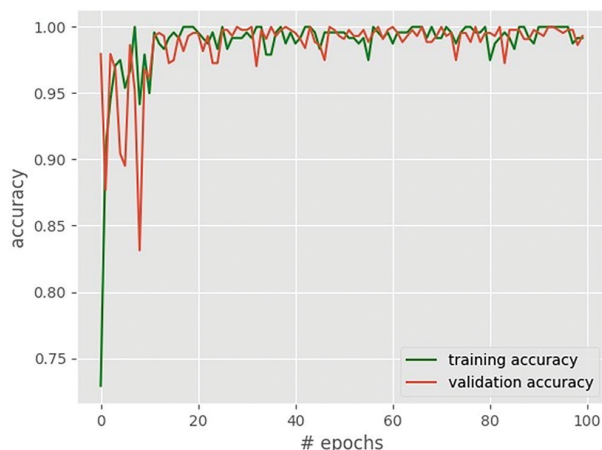


Figure 2. Accuracy of training and validation dataset.

CONCLUSION

Using the CNN model of deep learning, implemented a system that can classify weeds and crops. The features are extracted from the input images using convolutional layer. Pooling layer is used to downsizing the image. Finally, dense layer is used for classification. Further it can be extended in future that which can help in detecting weeds from the large crops or plants sizes and can be improved to make work with the more types of crops and weeds for the accurate classification and to reduce the human efforts. It will be easier to find any weed or crop with less human efforts.

REFERENCES

- [1] T. W. Berge, A. H. Aastveit, and H. Fykse, "Evaluation of an algorithm for automatic detection of broad-leaved weeds in spring cereals," *Precis. Agricult.*, vol. 9, no. 6, pp. 391–405, Dec. 2008.
- [2] E. Hamuda, M. Glavin, and E. Jones, "A survey of image processing techniques for plant extraction and segmentation in the field," *Comput. Electron. Agricult.*, vol. 125, pp. 184–199, Jul. 2016.
- [3] H. Mennan, K. Jabran, B. H. Zandstra, and F. Pala, "Non-chemical weed management in vegetables by using cover crops: A review," *Agronomy*, vol. 10, no. 2, p. 257, Feb. 2020.
- [4] X. Dai, Y. Xu, J. Zheng, and H. Song, "Analysis of the variability of pesticide concentration downstream of inline mixers for direct nozzle injection systems," *Biosyst. Eng.*, vol. 180, pp. 59–69, Apr. 2019.
- [5] D. C. Slaughter, D. K. Giles, and D. Downey, "Autonomous robotic weed control systems: A review," *Comput. Electron. Agricult.*, vol. 61, no. 1, pp. 63–78, Apr. 2008.
- [6] K. Liakos, P. Busato, D. Moshou, S. Pearson, and D. Bochtis, "Machine learning in agriculture: A review," *Sensors*, vol. 18, no. 8, p. 2674, Aug. 2018.
- [7] Kamilaris, A., and Prenafeta-Boldú, F. X. (2018). Deep learning in agriculture: A survey. *Computers and electronics in agriculture*, 147, 70–90.
- [8] Merfield, C. N. (2016). Robotic weeding's false dawn? Ten requirements for fully autonomous mechanical weed management. *Weed Research*, 56(5), 340–344. <https://doi.org/10.1111/wre.12217>
- [9] Wang, A., Zhang, W., and Wei, X. (2019). A review on weed detection using ground-based machine vision and image processing techniques. *Computers and Electronics in Agriculture*.
- [10] Fawakherji, M., Youssef, A., Bloisi, D., Pretto, A., and Nardi, D. (2019). Crop and weeds classification for precision agriculture using context-independent pixel-wise segmentation. 2019 Third IEEE International Conference on Robotic Computing (IRC), 146–152.
- [11] Fernández-Quintanilla, C., Peña, J., Andújar, D., Dorado, J., Ribeiro, A., and López-Granados, F. (2018). Is the current state of the art of weed monitoring suitable for site-specific weed management in arable crops? *Weed research*, 58(4), 259–272. *d electronics in agriculture*, 158, 226–240.
- [12] Ajinkya Paikerkari, Vrushi Ghule, et al., "Weed detection using image processing" *International Research Journal of Engineering and Technology* (March 2016).
- [13] Riya Desai, et al., "Removal of weeds using Image Processing" *International Journal of Advanced Computer Technology (IJACT)* (2016).
- [14] Ashintosh K Shinde, et al., "Crop detection by machine vision for weed management" *International Journal of Advances in Engineering & Technology* (July, 2014).
- [15] A Satish kumar, et al., "Detection of weeds in a crop row using image processing" *Imperial Journal of Interdisciplinary Research* (2016).
- [16] Amruta A. Aware, "Crop and weed detection based on texture and size features and automatic spraying of herbicides" *International Journal of Advanced Research* (2016).

- [17] Batriz Nathlia, et al., "A computer vision application to detect unwanted weed in early stage crops" WSEAS (2016).
- [18] P. Prema, "A Novel approach for weed classification using curvelet transform and tamura texture feature (CTTTF) with RVM classification" International Journal of Applied Engineering Research (2016).
- [19] Marinoudi, V., Sorensen, C., Pearson, S. and Bochtis, D., 2019. Robotics and labour in agriculture. A context consideration. *Biosystems Engineering*, pp. 111–121.
- [20] Dankhara, F., Patel, K. and Doshi, N., 2019. Analysis of robust weed detection techniques based on the Internet of Things (IoT). Coimbra, Portugal, Elsevier B.V, pp. 696–701.
- [21] Daman, M., Aravind, R. and Kariyappa, B., 2015. Design and Development of Automatic Weed Detection and Smart Herbicide Sprayer Robot. *IEEE Recent Advances in Intelligent Computational Systems (RAICS)*, pp. 257–261.
- [22] Liang, W.-C., Yang, Y.-J. and Chao, C.-M., 2019. Low-Cost Weed Identification System Using Drones. *Candarw*, Volume 1, pp. 260–263.
- [23] Bah, M. D., Hafiane, A. and Canals, R., 2017. Weeds detection in UAV imagery using SLIC and the hough transform. 2017 Seventh International Conference on Image Processing Theory, Tools and Applications (IPTA), pp. 1–6.